



technical data type **FUTURIX Led Ecoline**

Base: Glass reinforced polyester, compression moulded (GRP).

- **Optional :** - Stainless steel suspension bracket.
- IP66 Wieland connector.
- IP66 Stucchi connector.

Diffuser: is made of a special frosted polycarbonate for a smooth uniform lighting.


- **Optional :** Acrylic frosted diffuser.

Impact strength data of the diffuser:

diffuser in PC > 6 Nm
PMMA > 0,22 Nm

Clips: 1-part polycarbonate clips.

- **Optional :** 1-part stainless steel clips.

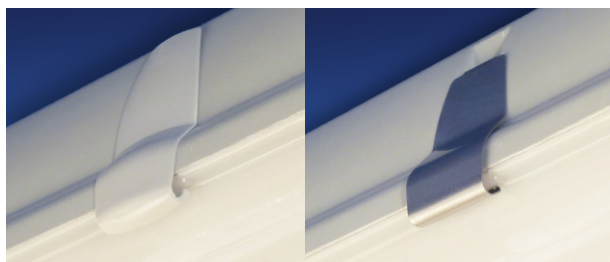

Polycarbonate clip

Stainless steel clip (optional)



High quality linear Led module

Stainless steel suspension bracket (optional)



IP65 Wieland connector (optional)

Specifications:

- Product life min. 50.000h L70 B10 at Ta.max.
- Available in 4000K with CRI of min. 80.
- **Optional :** 3000 and 6500K.
- Luminous efficiency frosted diff.: up to ** 108 lm/W.
- 220-240V 0/50/60 Hz.
- Ta: -15°C/Ta.max.
- **Optional :** - 1-10v and Dali
- Trough-wiring in polyester housing.
(This will influence slightly the Ta.max.)


Housing	Power(W)*	Flux(Lumen)**	Ta.max.°C
236 (frosted)	36	3900	35
258 (frosted)	46	4900	35

* Total power consumption of Led's and driver.

** Luminous flux of fitting @ 25°C for 840.



technical data type **FUTURIX Led** **Ecoline**

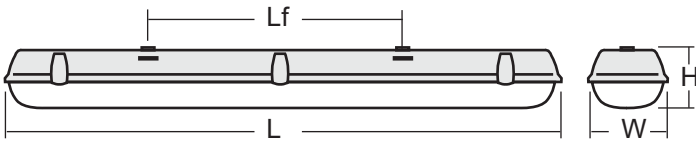

Housing	L	W*	H	Lf	Clips	Kg	m3
236	1275	134	98.5	800	8	2,9	0,023
258	1575	134	98.5	1100	10	3,8	0,028

*Dimensions without clips

